


特点: 带急停开关及强制断开限位开关,
防护等级 IP54, 带热保护装置。

Trait: with urgent stop switch and reinforced
breaking switch with position limit, Protection
class up to IP54, with thermal prevention device.

PA200A PA250A PA300A

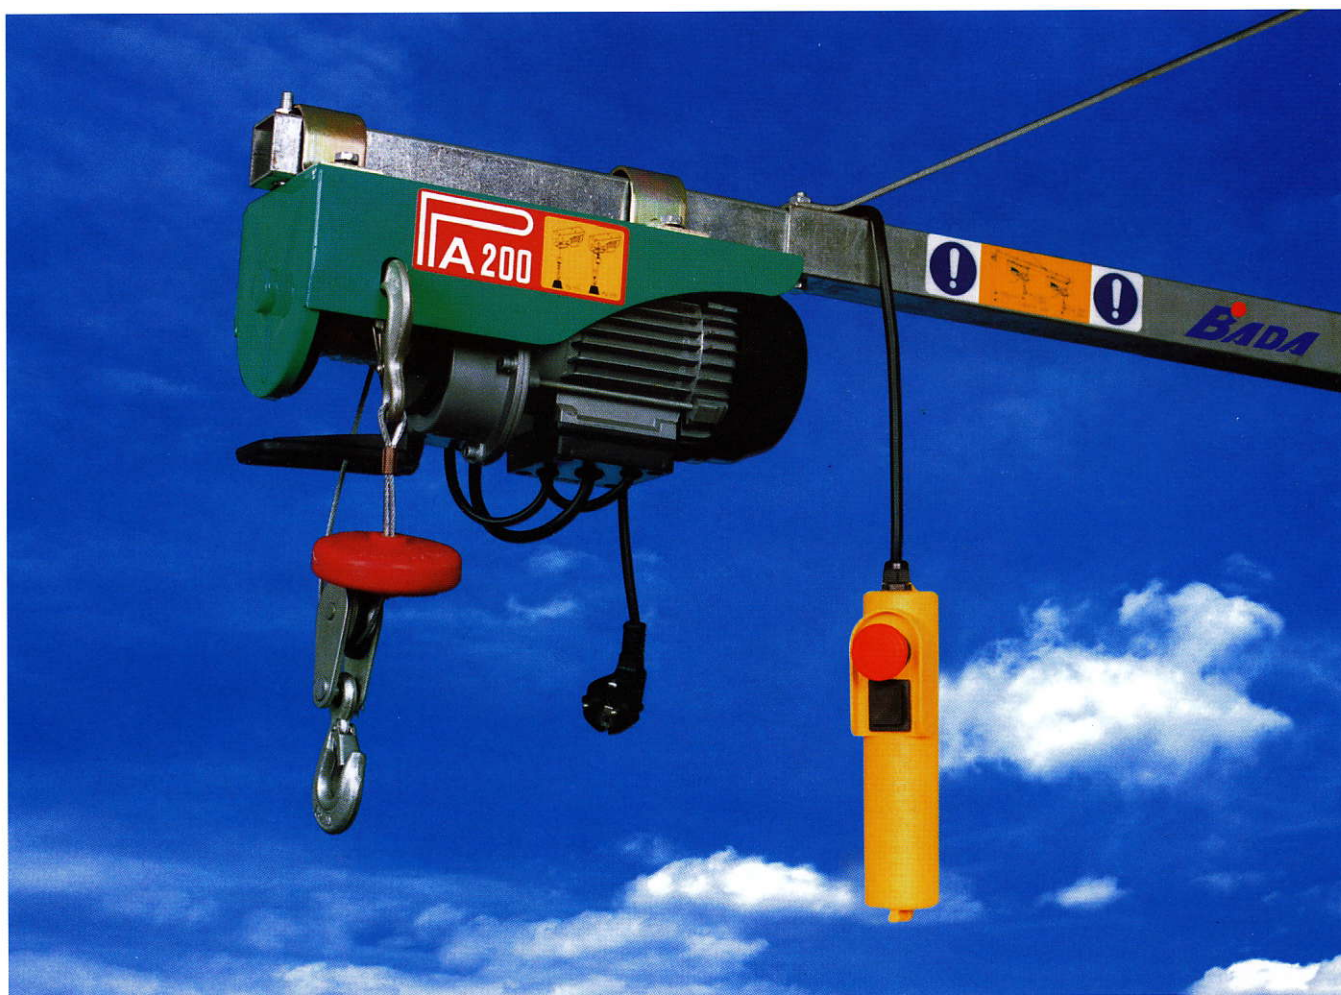

● 电动葫芦 ELECTRIC HOIST

产品型号 Specification	使用方法 Method of use	额定电压 Rated volt(V)	输入功率 Input power (W)	额定起重量 Rated lifting weight(kg)	起升速度 Lifting speed (m/min)	起升高度 Lifting height (m)	每件数量 Quan/CTN (PCS)	包装尺码 Packing dim- ension(cm)	毛重/净重 G.W./N.W. (kg)
HGS-B100-12 PA200A	单钩 Single-hook	220/230	450	100	10	12	2	46×36×16	24/22
	双钩 Double-hook			200	5	6			
HGS-B125-12 PA250A	单钩 Single-hook	220/230	500	125	10	12	2	46×36×16	25/23
	双钩 Double-hook			250	5	6			
HGS-B150-12 PA300A	单钩 Single-hook	220/230	550	150	10	12	2	46×36×16	26/24
	双钩 Double-hook			300	5	6			