
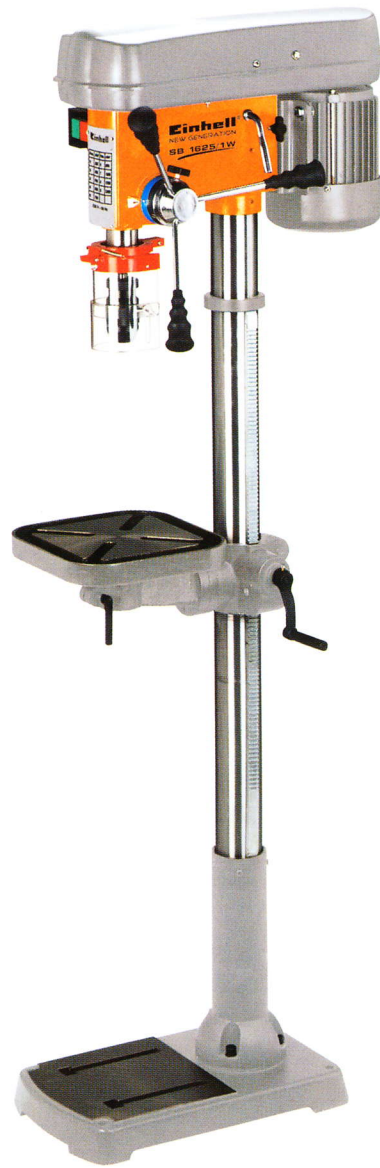


CE

SB 1625 / 1W

BENCH DRILL



Mains voltage	230V ~ 50Hz
Rating	700 W (S2 15 min.)
Spindle speed	12 settings 120–2,500 rpm
Drill bench angle	-45° settings +45°
Drill chuck mount	B16
Drill bit diameter	Ø 3 mm to Ø 16 mm
Throat	169 mm
Max. drill depth	80 mm
Overall height/weight	1,590 mm / 6.0 kg
Packing dimensions	1,145 x 480 x 295 mm
Unit pack	1 piece
EAN code	4006825 506747
Article number	42.512.20

1 2 3 4


Quick-change drill chuck




12 speed settings



Adjustable depth stop



Complete with vise



SB 1625/1D (THREE-PHASE CURRENT)

Mains voltage	400 V ~ 50 Hz
Unit pack	1 piece
EAN code	4006825 504996
Article number	42.512.10



Reverse facility: Machines with a reverse facility are ideal for thread tapping. Einhell bench drills with three-phase current motors offer this feature.

