



For use on lathes, rotary tables, indexing heads, etc.  
Hard reversible jaws.

Standard accessories:

- 1 set of hard sectional jaws (master+hard top reversible)
- 1 wrench
- 1 set of mounting screws.

Optional accessories:

- 1 set of soft top jaws
- 1 set of outside hard solid jaws
- 1 set of inside hard solid jaws

三爪自定心卡盘适用于车床，分度头等。

标准配件：

- 一套分离爪
- 一个扳手
- 一套安装螺丝

可选配件：



- 一套软上爪
- 一套正爪
- 一套反爪

## K11 SERIES 3-JAW SELF-CENTERING CHUCKS (2-PICES JAW) K11 系列三爪自定心卡盘

FUERDA



前锁  
Front Mounting

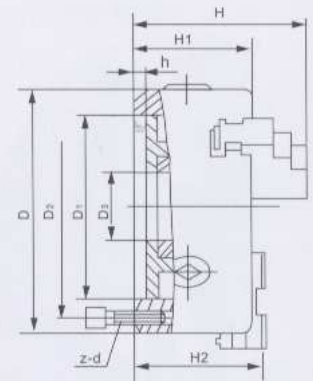

### 规格表 SPECIFICATIONS

单位/UNIT: mm

| 卡盘尺寸<br>chuck size | D1  | D2  | D3  | H     | H1  | H2    | h | z-d   | 最大输入扭矩NM<br>Max.input torque | 极限转速R.P.M<br>Max.speed | 净重Kg<br>Net wt. | Code No. |
|--------------------|-----|-----|-----|-------|-----|-------|---|-------|------------------------------|------------------------|-----------------|----------|
| 125                | 95  | 108 | 30  | 95    | 58  | 63    | 4 | 3-M8  | 100                          | 3000                   | 4.8             | K11-125A |
| 130                | 100 | 115 | 30  | 97    | 60  | 65    | 5 | 3-M8  | 100                          | 3000                   | 4.3             | K11-130A |
| 160                | 130 | 142 | 45  | 109   | 65  | 71    | 5 | 3-M8  | 160                          | 2500                   | 8.3             | K11-160A |
| 190                | 155 | 172 | 55  | 122   | 75  | 80    | 5 | 3-M10 | 250                          | 2000                   | 9.5             | K11-190A |
| 200                | 165 | 180 | 65  | 122   | 75  | 80    | 5 | 3-M10 | 250                          | 2000                   | 13.0            | K11-200A |
| 230                | 190 | 210 | 70  | 136   | 80  | 86    | 6 | 3-M12 | 250                          | 2000                   | 14.5            | K11-230A |
| 240                | 195 | 215 | 70  | 136   | 80  | 86    | 8 | 3-M12 | 320                          | 1600                   | 22.5            | K11-240A |
| 250                | 206 | 226 | 80  | 136   | 80  | 86    | 5 | 3-M12 | 320                          | 1600                   | 23.0            | K11-250A |
| 315                | 260 | 285 | 100 | 156.5 | 90  | 99.5  | 6 | 3-M16 | 400                          | 1200                   | 41              | K11-315A |
| 320                | 270 | 290 | 100 | 156.5 | 90  | 99.5  | 6 | 3-M16 | 400                          | 1200                   | 42              | K11-320A |
| 325                | 272 | 296 | 100 | 156.5 | 90  | 99.5  | 6 | 3-M16 | 400                          | 1200                   | 41              | K11-325A |
| 380                | 325 | 350 | 130 | 173.5 | 100 | 112.5 | 6 | 3-M16 | 500                          | 1000                   | 46              | K11-380A |
| 400                | 340 | 368 | 130 | 173.5 | 100 | 112.5 | 6 | 3-M16 | 500                          | 1000                   | 62              | K11-400A |
| 500                | 440 | 465 | 210 | 202   | 115 | 126   | 6 | 6-M16 | 630                          | 800                    | 71              | K11-500A |
| 630                | 545 | 586 | 252 | 220.5 | 135 | 144.5 | 7 | 6-M16 | 800                          | 800                    | 200             | K11-630A |