




● BS - 3



### Model : BS - 3

#### FEATURES :

- The HCM-2 is designed and made according to characteristics and advantages to all kinds of dividing heads, suitable for general dividing, gear and rack spindle cutting, in many use.
- Designed for super hole 55.5mm of diameter, shaft hole. Slope of end hole is Morse's taper No. 6 and the HCM-2 can be adjusted from being level or vertical (0°~90°)
- All the HCM-2's shaft, spindle center, worm and gear are made of super steels through grinding, heat treatment, to achieve rigid construction.
- Its tailstock designed in dovetail joint, very strong in structure which is available for heavy-duty load, also the degree can be adjusted in every direction.
- The ratio of worm and worm gear is 1:40.
- The Dividing plate is available in two sides, A and B. A Face 24, 25, 28, 30, 34, 37, 39, 41, 42, 43, B Face 46, 47, 49, 51, 53, 54, 57, 58, 59, 62, 66.
- The changable gears are 24, 28, 32, 38, 40, 44, 48, 56, 64, 72, 86 and 100
- Standard accessories are : Center, Carrier, Gear Bracket, Gear Set.
- Center Height of Tail Stock  
Max. 165mm  
Min. 38mm

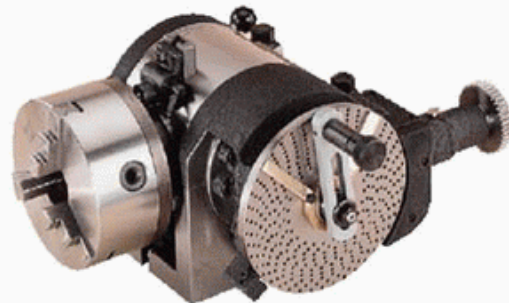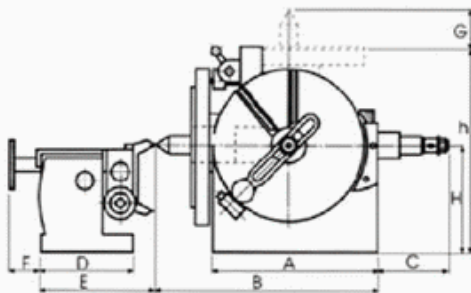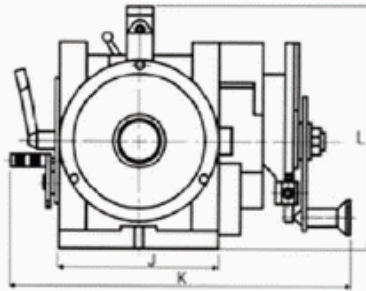

**OPTIONAL ACCESSORY :**  
3-Jaw Chuck 7"

Unit:mm

Modle	A	B	C	D	E	F	G	H	h	J	K	L	N.W. (kg)
BS-3	365 9/16	322 12/11/16	152 6	166 6/17/32	198 7/25/32	50 15/16	52	146	278	194	465	290	132