



SIL-AIR








SIL-AIR 50 TC





 **50 l/min - 1.77 CFM**


 **8 bar - 116 psi**

Modello con telaio in tubolare
Model with tubular frame
Modèle avec structure tubulaire
Modelle mit Rohrrahmen
Modelo con chasis tubular

						
Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dB/1m	Kg (Lbs)	Kg (Lbs)
230/50	37 (1.3)	3.5 (0.92)	340	40	21 (46)	22 (48)
115/60	44 (1.55)		400			

* = @ 5 bar (70 PSI)

	A mm	B mm	C mm
	280	350	340
	300	380	370

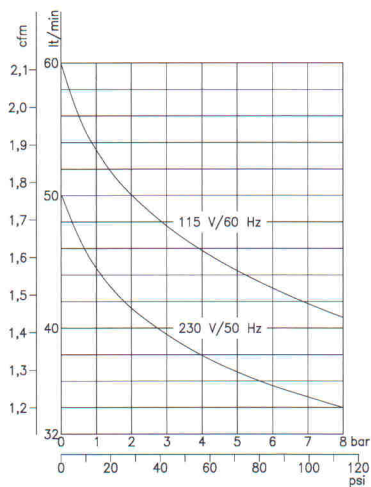

SIL-AIR 50 TC